



WaterPro®
Warren, Ohio

Series AIO

(Air Injection Oxidizing)
Automatic Filters


Control Valve 2510-SXT

- *Timer control causes the backwash cycles to occur at prescribed intervals. Backwash can be during the time that owners are sleeping.*
- *Pressure vessel has molded liner that is filament wound with a fiberglass/epoxy resin laminate for reinforcement.*
- *Does not require an air injector.*
- *No restriction on well pump.*
- *No added tank with air release.*
- *No regeneration chemicals.*

How it Works:

Patented air injection & piston on the Control Valve adds air to the filter media tank during the draw cycle. The water then passes through trapped air in tank which oxidizes iron and sulfur (all in one tank). During regeneration, oxidized

minerals are backwashed out, filter tank is replenished with oxygen from the atmosphere and the unit shifts back into service.

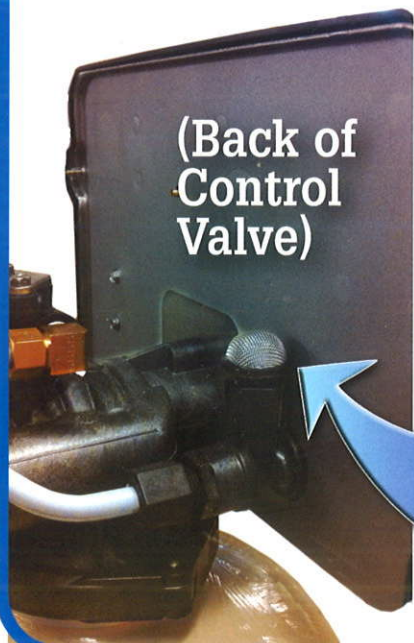

Models

AIO-B-10

AIO-B-15

AIO-B-20

BIRM Iron Removal with Neutral pH...No sulfur or oil.

AIO-MMB-10

AIO-MMB-15

AIO-MMB-20

MIXED MINERAL BED

Iron & Sulfur Removal with a pH of 6.5 or higher. (Will raise pH).

AIO-AQ-10

AIO-AQ-15

AIO-AQ-20

AquaSorb CARBON

Sulfur and small amounts of Iron Removal.

AIO-ZP-10

AIO-ZP-15

AIO-ZP-20

Zeo Prep Filtration down to 5 micron.

Custom systems with specified minerals are available upon request.

Specifications on back.

Form F-1-A-14



Series AIO

(Air Injection Oxidizing)
Automatic Filters

Control Valve:
2510-SXT



Series AIO


Air Injection Oxidizing

Removes iron and hydrogen sulfide effectively and economically without the need for expensive chemicals or troublesome pumps or external air injectors.



Model Number Code:

AIO - B - 10

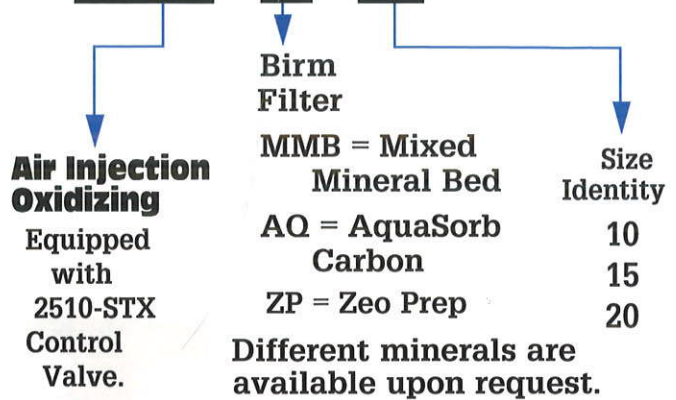


Specifications:

Capacity:

Dimensions:

Model:	Flow Rate (GPM):	Backwash (GPM Req'd):	Overall Height A:	Tank Height B:	Tank Diam. C:
AIO-10	3.5	7	53 1/2	44	10
AIO-15	4.5	7	63 1/2	54	10
AIO-20	7	10	63 1/4	54	13

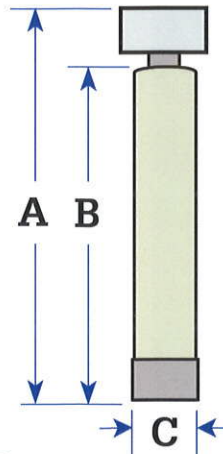

Minimum Piping Size	Approx. Weight (Lbs.)
3/4	125
3/4	135
3/4	190



Specifications subject to change without notice.

Form F-1A-14